

VM3B1
VM3B - 036 - 1 N 00 - B 1 01 *

Series external drain

Series internal drain

Torque

- 009 = 0.130 Nm/bar
- 012 = 0.186 Nm/bar
- 018 = 0.304 Nm/bar
- 027 = 0.485 Nm/bar
- 036 = 0.624 Nm/bar

Type of shaft

- 1 - keyed (no SAE)
- 3 - splined (SAE A)
- 4 - splined (SAE B)

Rotation

- N - bi-directional

View from shaft end:

- CW rotation A = inlet
B = outlet
- CCW rotation A = outlet
B = inlet

Modifications

Port connections

- 00 = SAE threaded port
SAE drain
- 01 = SAE 4 bolt flange
BSPP drain
- 02 = BSPP threaded port
BSPP drain


Seal class

- 1 - S1
- 4 - S4
- 5 - S5


Design letter

Porting combination


- 00 - standard



INTERNAL LEAKAGE

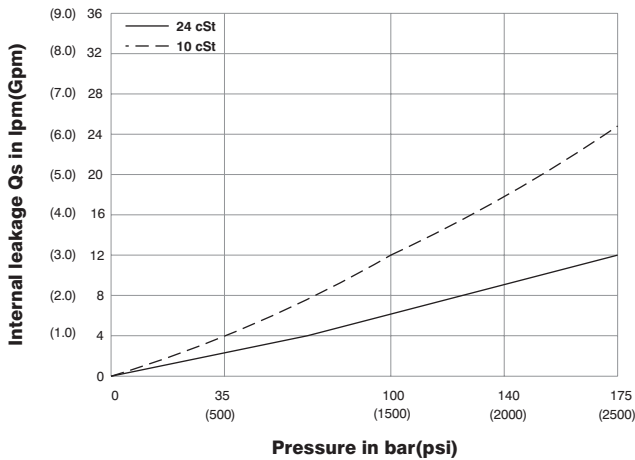


PERMISSIBLE RADIAL AND AXIAL LOADS

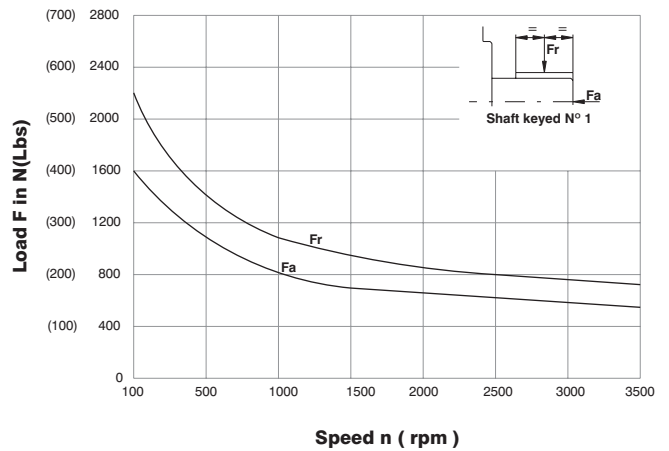


Do not apply Fr and Fa loads simultaneously

OPERATING CHARACTERISTICS - TYPICAL (24 cSt)


Model	Series	Volumetric Displacement Vi		Input flow at n = 2000 rpm				Torque T at n = 2000 rpm		Power output at n = 2000 rpm	
				Theoretical		at 175 bar (2500 psi) Δp		at 175 bar (2500 psi) Δp		at 175 bar (2500 psi) Δp	
		in ³ /rev	cm ³ /rev	GPM	l/min	GPM	l/min	in.lbf	Nm	HP	KW
VM3B	009	0.56	9.2	4.9	18.4	8.0	30.4	174.3	19.7	5.8	4.3
	012	0.75	12.3	6.5	24.6	9.7	36.6	236.3	26.7	7.8	5.8
	018	1.13	18.5	9.8	37.0	12.9	49.0	412.4	46.6	13.4	10.0
	027	1.70	27.8	14.7	55.6	17.8	67.6	680.5	77.4	21.8	16.3
	036	2.26	37.1	19.6	74.2	22.8	86.2	902.6	102.0	28.3	21.1

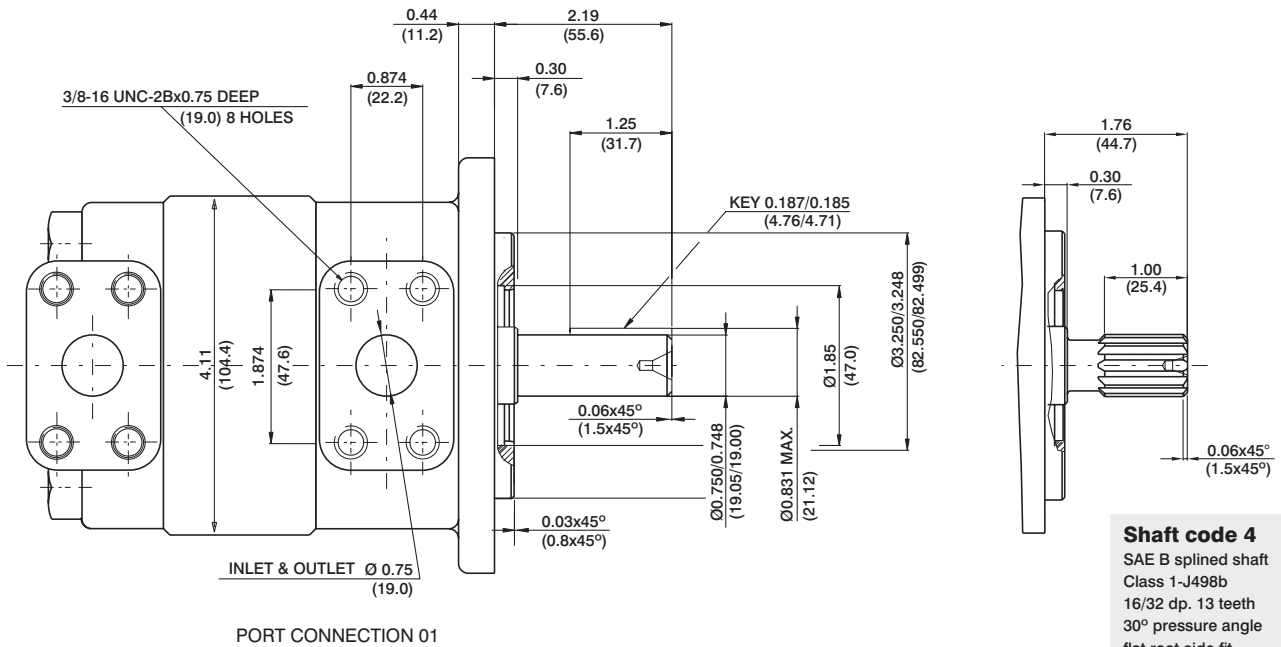

Shaft code 4
 SAE B splined shaft
 Class 1-J498b
 16/32 dp. 13 teeth
 30° pressure angle
 flat root side fit

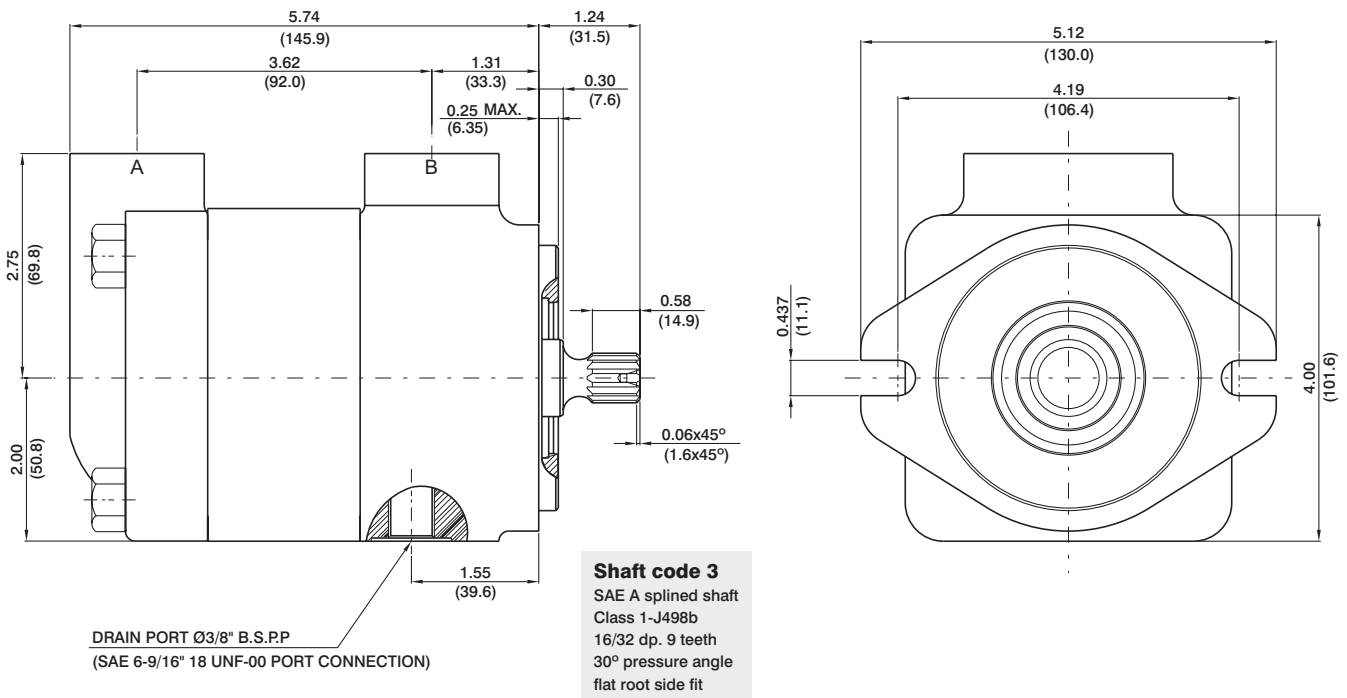


SAE 12(1 1/16"-12 UNF)



PORT CONNECTION 00

3/4 BSPP-0.75 DEEP (19.0)



PORT CONNECTION 02